
LIGHTOLIER®

Lytecaster[®] Recessed Downlighting **1000LVR**

Page 1 of 1

5" Aperture Standard Low Voltage MR16 Non-IC Remodeler Frame-in Kit

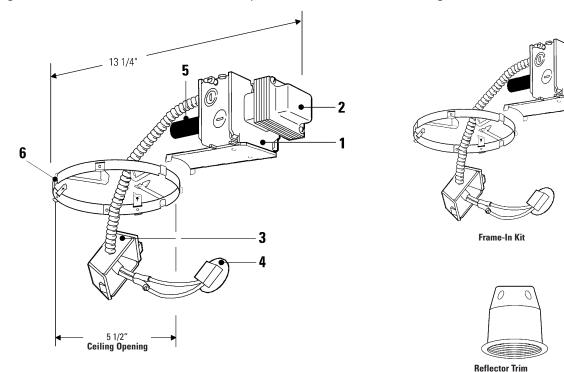

Complete Fixture consists of Reflector Trim & Frame-In Kit. Select each separately.

| Frame-In Kit | Reflector Trims — See Individual Reflector Trim Specification Sheets | | | | |
|--------------|---|---|---------|--------|--|
| | Adjustable | | | | |
| 1000LVR | Baffles | Aperture Cone | Pinhole | Elbow | |
| | 1055LV 1055WHLV | 1056LV 1064WDLV 1063LV 1064WDPLV 1064LV 1064CDLV | 1052LV | 1062LV | |

Features

- Junction Box: 4" x 3 1/2" x 2"; .063" (#14 ga.) galvanized steel. UL listed for 90° C supply wire. Integral cable clamps permit attachment of nonmetallic Romex[®] or armored cable without need of additional connectors.
- 2. Transformer: Outboard mounted, magnetic, 120V. primary, nominal 12V. secondary. Removable from below.
- 3. Socket Housing: .036" (#20 ga.) galvanized steel.
- Socket: Field replaceable. Two pin socket, pre-wired with #18 SF1 leads to junction box.
- 5. Thermal Protector: Meets NEC and UL requirements. Insulation must be kept 3" away from fixture sides and wiring compartments and must not be placed above fixture in a manner which will entrap heat.
- **6. Mounting Ring:** .048 (#18 ga.) galvanized steel. Accommodates existing ceilings up to 2" thick. Attaches securely to any type of ceiling material without tools using (3) mounting straps provided. Push-in/twist out clips hold reflector flush to ceiling. Includes adhesive backed aperture template.

Dimming

Dimming Controls: Use only dimmers specifically designed for use with transformers, like Lightolier Onset[®], Sunrise[®] series LV or VA dimmers, or any Lightolier Controls dimming system. Low voltage fixtures may produce audible sound when used with dimmers, which may be objectionable in acoustically critical areas.

Options & Accessories

| MR16 Socket Replacement: |
|--------------------------|
| 277V Remote Step |
| Down Transformer: |

1975A 7997 - 277V down to 120V 300W max. load.

Labels

UL (Suitable for Damp Locations), I.B.E.W.

Romex[®] is a registered Trademark of General Cable Industries Inc. US Patent No's.: 5,957,572 and other US and Foreign Patents Pending.

| Job Information | Туре: |
|-----------------|-------|
| Job Name: | |
| Cat. No.: | |
| | |
| Lamp(s): | |
| Notes: | |
| | |
| | |
| | |

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710 We reserve the right to change details of design, materials and finish. www.lightolier.com © 2008 Philips Group • G1208

Lightolier is a Philips group brand

